



LED Spot GU10

TPA-GU10 COB

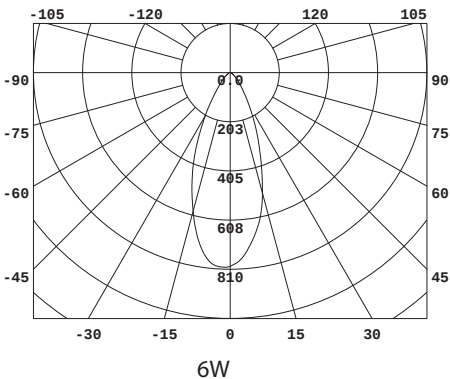

Dimmable and Not Dimmable



CCT (K): 3000 K / 4000 K / 5700 K



Item	V	W	PF	Hz	Ra	Lm	Useful Lm	Replace	Life time	Beam angle
GU10 4w Ra80	220 - 240	4	>0.5	50/60	>80	250	230	35w	25000h	36°/60°
GU10 4w Ra80 DIM	220 - 240	4	>0.9	50/60	>80	250	230	35w	25000h	36°/60°
GU10 4w Ra90	220 - 240	4	>0.5	50/60	>90	250	230	35w	25000h	36°/60°
GU10 4w Ra90 DIM	220 - 240	4	>0.9	50/60	>90	250	230	35w	25000h	36°/60°
GU10 6w Ra80	220 - 240	6	>0.5	50/60	>80	380	345	50w	25000h	36°/60°
GU10 6w Ra80 DIM	220 - 240	6	>0.9	50/60	>80	380	345	50w	25000h	36°/60°
GU10 6w Ra90	220 - 240	6	>0.5	50/60	>90	380	345	50w	25000h	36°/60°
GU10 6w Ra90 DIM	220 - 240	6	>0.9	50/60	>90	380	345	50w	25000h	36°/60°